

FIG. 1

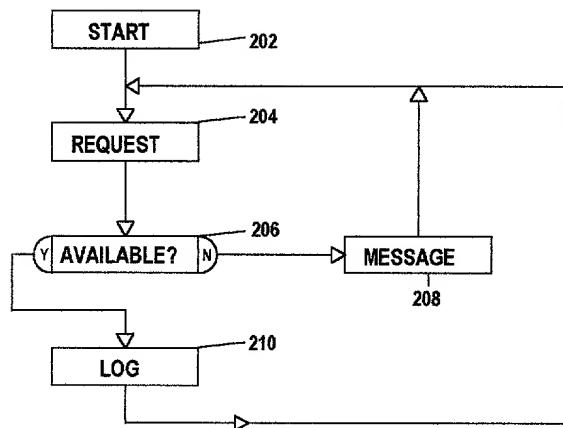


FIG. 2A


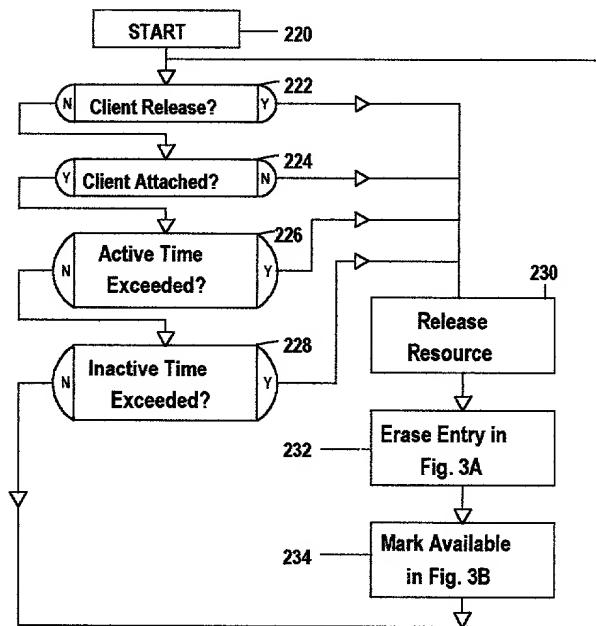



FIG. 2B

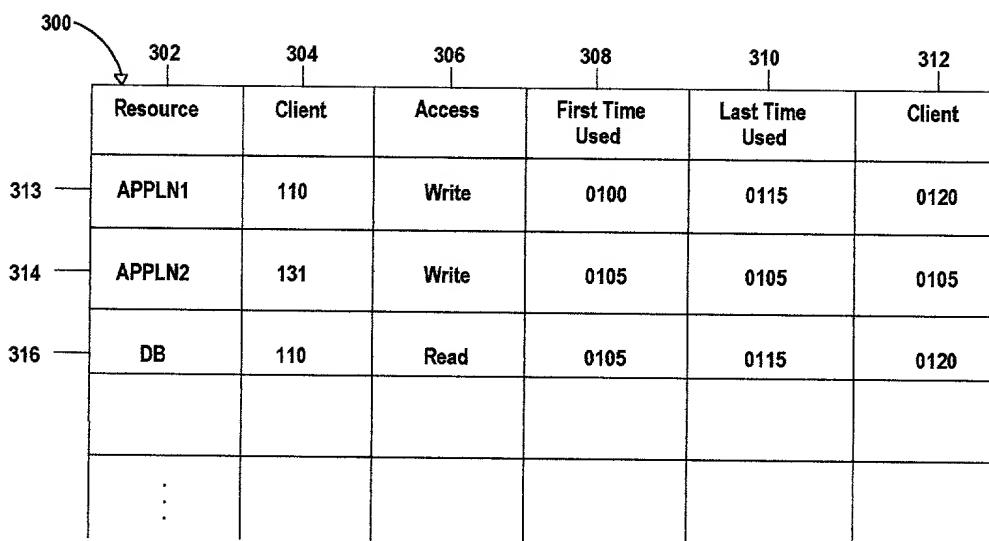

A table with six columns: Resource, Client, Access, First Time Used, Last Time Used, and Client. The table has five rows, each labeled with a number on the left: 313, 314, 316, and two unlabeled rows below them. The first three rows contain data: Row 313 has APPLN1, 110, Write, 0100, 0115, 0120; Row 314 has APPLN2, 131, Write, 0105, 0105, 0105; Row 316 has DB, 110, Read, 0105, 0115, 0120. The last two rows are empty.

	Resource	Client	Access	First Time Used	Last Time Used	Client
313	APPLN1	110	Write	0100	0115	0120
314	APPLN2	131	Write	0105	0105	0105
316	DB	110	Read	0105	0115	0120
	:					
	:					

FIG. 3A

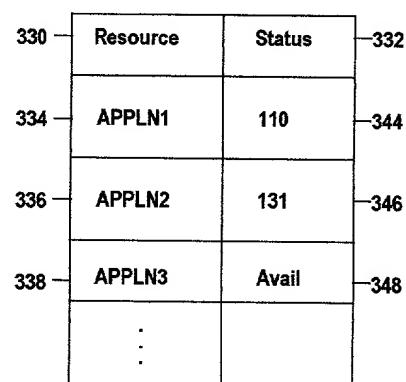

A table with two columns: Resource and Status. It has four rows, each labeled with a number on the left: 330, 334, 336, and 338. The first three rows contain data: Row 330 has APPLN1, 110; Row 334 has APPLN2, 131; Row 338 has APPLN3, Avail. The last row is empty.

	Resource	Status	
330	APPLN1	110	332
334	APPLN2	131	344
336	APPLN3	Avail	346
338	:		348

FIG. 3B